

KSC-F2




General


- HID USB 마우스 및 키보드
- 2개의 RS-485 포트
- 단축키 기능
- 다양한 부가 기능(자가진단, Stop Watch, 프로토콜분석 기능 등)
- 16개 이상의 프로토콜 탑재
- 돔 카메라, 리시버, DVR 동시 제어 가능
- 조이스틱과 조그 셔틀 채용으로 조작의 편리성

Drawings (mm)


Upper

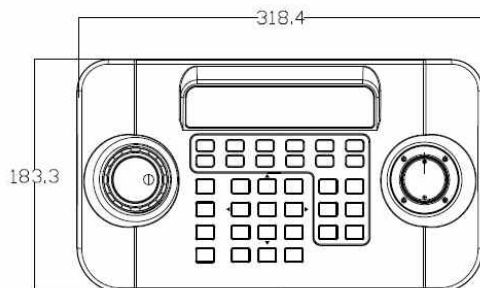

Front

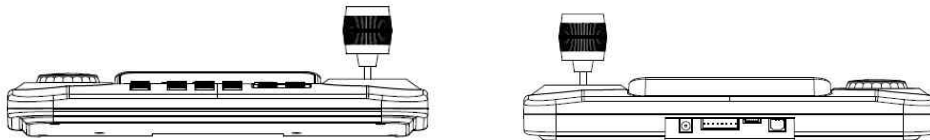

Side

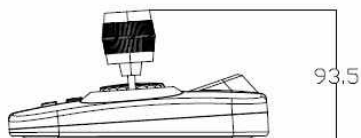

Technical Specifications

KSC-F2 USB SYSTEM CONTROLLER SPECIFICATION		
COM PORT	PORT 1	TERMINAL BLOCK HALF DUPLEX / FULL DUPLEX
	PORT 2	TERMINAL BLOCK HALF DUPLEX / FULL DUPLEX
PROTOCOL	PELCO-D / PELCO-P / SAMSUNG-E / SAMSUNG-T / VICON / PANASONIC / BOSCH / GE / HONEYWELL / ELMO / AD / ERNA / VCL TP / YOUJIN / W-DRX / SUNGJIN	
BAUDRATE	2400 / 4800 / 9600 / 19200 / 38400 / 57600 BPS	
KEYBOARD ADDRESS	0~9 (STANDALONE, MASTER , SUB)	
PTZ No	0~255	
DVR No	0~255	
DVR CONTROL	SAMSUNG DVR (SAMSUNG-E, SAMSUNG-T)	
FUNCTION KEY	ESC / SET / PTZ / CAM / PRESET / SCAN / PATTERN / TOUR / AUTO / HID / AUX ON / AUX OFF	
DVR KEY	SET / DVR / CH / REW / F.F / FREEZE / MODE / SEQ / ALARM AUDIO / REC / PLAY / STOP / SEARCH / JOG SHUTTLE	
LENS KEY	CLOSE / OPEN / NEAR / FAR / WIDE / TELE / JOG SHUTTLE	
JOYSTICK	UP / DOWN / LEFT / RIGHT / TELE / WIDE	
NUMERIC KEY	0~9 / CLEAR / ENTER	
USB PORT	B TYPE SUPPORT USB 1.1 ~ USB 3.0	
USB DEVICE	HID MOUSE / HID KEYBOARD / SUPPORT HOT - KEY	
LCD VIEW	2X16 CHARACTER YELLOW BACKLIGHT LCD	
LED INDICATE	POWER / RX / TX	
POWER	DC 12V(1.5A) / DC JACK	
POWER CONSUMPTION	3W <	
I/O CONNECTOR	TERMINAL BLOCK 8P / FIRMWARE CONNECTOR	
OPERATION TEMPERATURE	0°C ~ 40°C	
OPERATION HUMIDITY	0~90%	
DIMENSION	320(W) X 183(H) X 94.5(D) (mm)	