

# CCTV 하우징 시리즈

## 알루미늄 다이캐스팅 하우징

Aluminum Die-casting Housing



# DH-5140SHB

Sun shield (S), Heater (H), Blower (B)

## 제품 특징 (Product Features)

CCTV  
HOUSING  
SERIES


- 알루미늄 재질의 실내/실외용 특수 하우징
  - Day&Ninght(IR LED 옵션)
  - 스마트 히터/팬 (옵션)
  - 완벽한 방수 (IP68)의 실내/실외용 하우징(Slide Open 타입)
  - Option : Sun shield (S), Heater (H), Blower (B)
- 
- Special housing for indoor / outdoor made of aluminum
  - Day & Ninght (IR LED option)
  - Smart heater / fan (optional)
  - Complete waterproof (IP68) indoor / outdoor housing (Slide Open type)
  - Option: Sun shield (S), Heater (H), Blower (B)

### MODEL OPTIONAL

- 1.DH-5140S ( Sun shield)
- 2.DH-5140SH ( Sun shield, Heater)
- 3.DH-5140SHB ( Sun shield, Heater, Blower)

## 제품 구성 (product composition)


(SIDE OPEN VIEW)

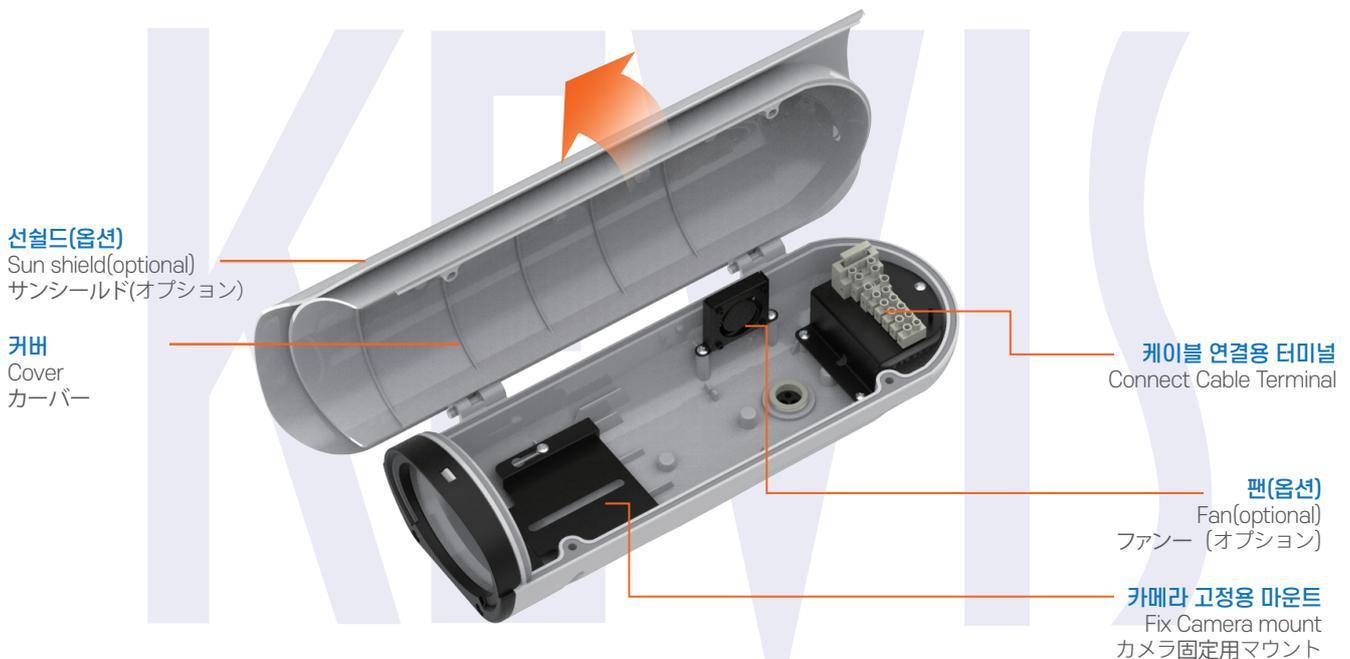

## 제품 구성 (product composition)


CCTV  
HOUSING  
SERIES

### (FRONT VIEW)

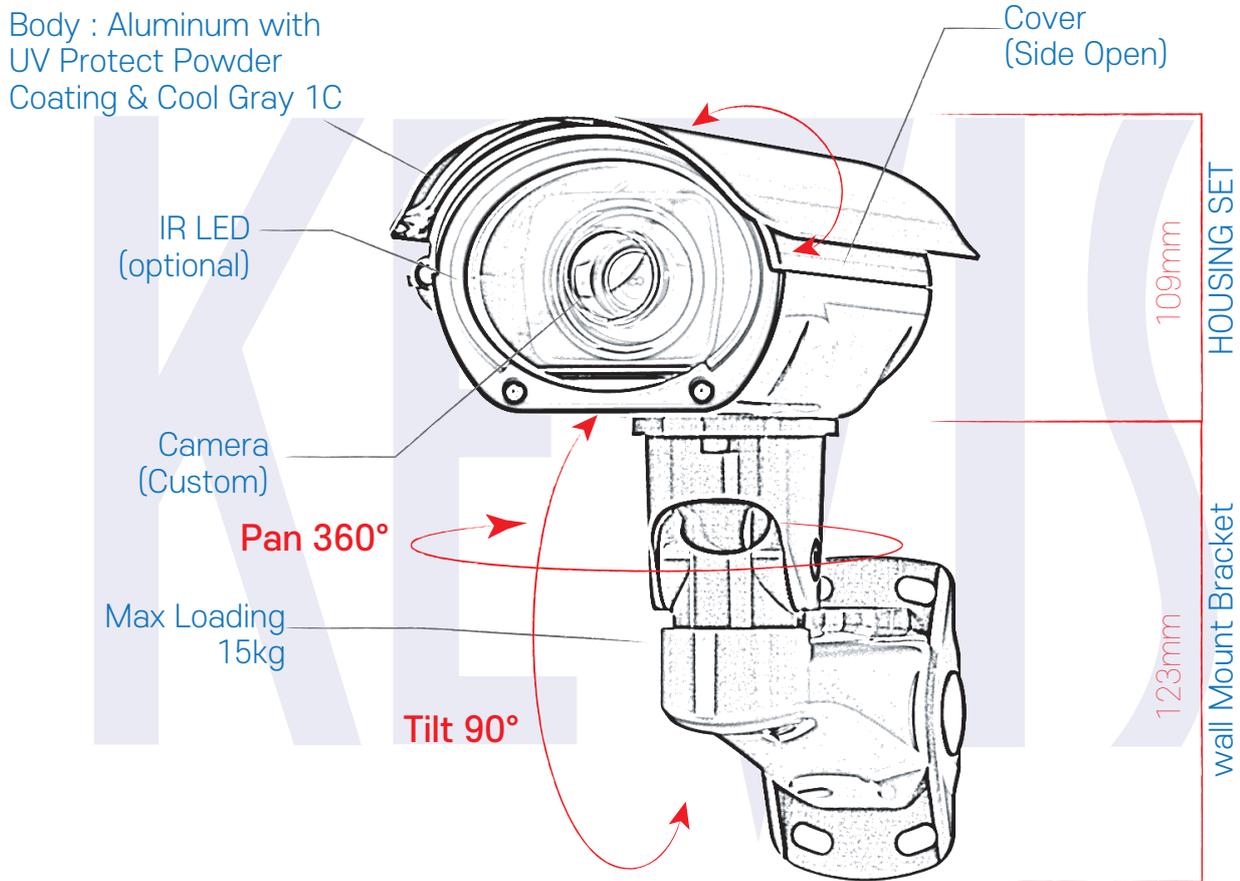

## 제품 크기 (Product Size)

UNIT mm

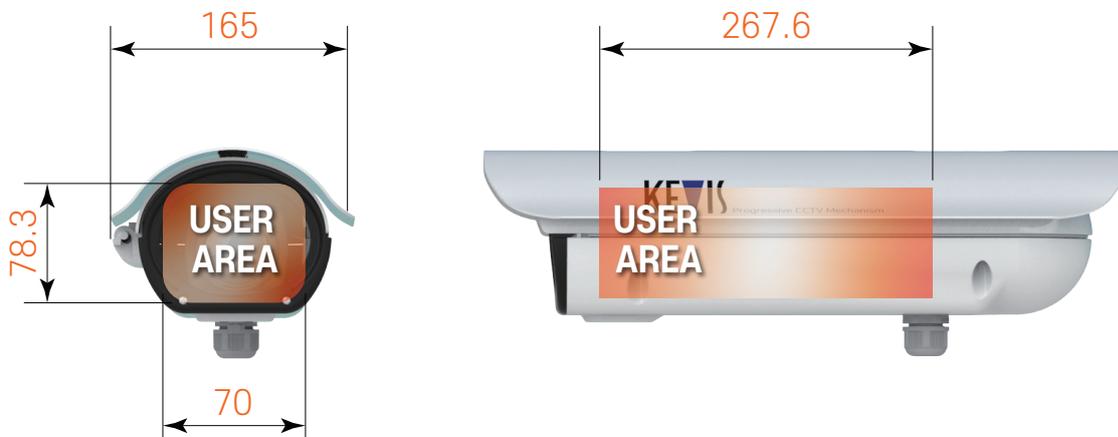

※ These specifications are standard and subject to change when designed.  
 ※ 상기 사양은 기본 사양으로 설계시, 변경될 수 있습니다.

## 제품 사양 (Specifications)

CCTV  
HOUSING  
SERIES

Usage & Open Type	Indoor / Outdoor & Side Hinge Type
Options	Sunshield (S), Heater (H), Blower (B), Defroster (D) IR LED Lamp(IR)
Body & Color	Aluminum with UV Protect Powder Coating & Cool Gray 1C
Power	AC 24V(20W) / AC115V(35W) / AC 230V(45W)
Temperature of use	DH-5140S : -15°C~+50°C DH-5140SHBD : -20°C~+50°C (Heater, Blower, Defroster)
Safety certification	CE
IP Level	IP 68
Dimension (Out side)	430mm x 146.2mm x 137mm
Dimension (In side)	267.6mm x 70mm x 75mm
Weight	2.6kg
Accessories	Spring Washa M6, Flat Washer M6, Screw 1/4"-20X3/8" 2 ea

# 2.6Kg

Standard and subject to change when designed.


※ 상기 사양은 기본 사양으로 설계시, 변경될 수 있습니다.

※ 上記仕様は基本仕様で設計時、変更される場合があります。

## 제품 액세서리 (Accessories)


UNIT(mm)

| KBR-080CC | Wall Mount

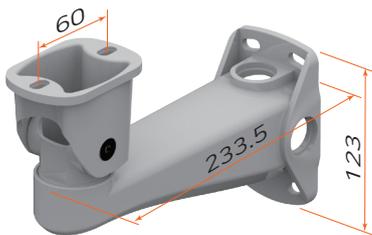

Specifications	
Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x172x73

| KBR-1000 | Wall Mount

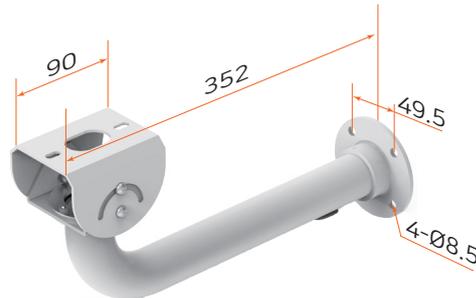

Specifications	
Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89