




KEVIS CCTV CAMERA HOUSING SERIES

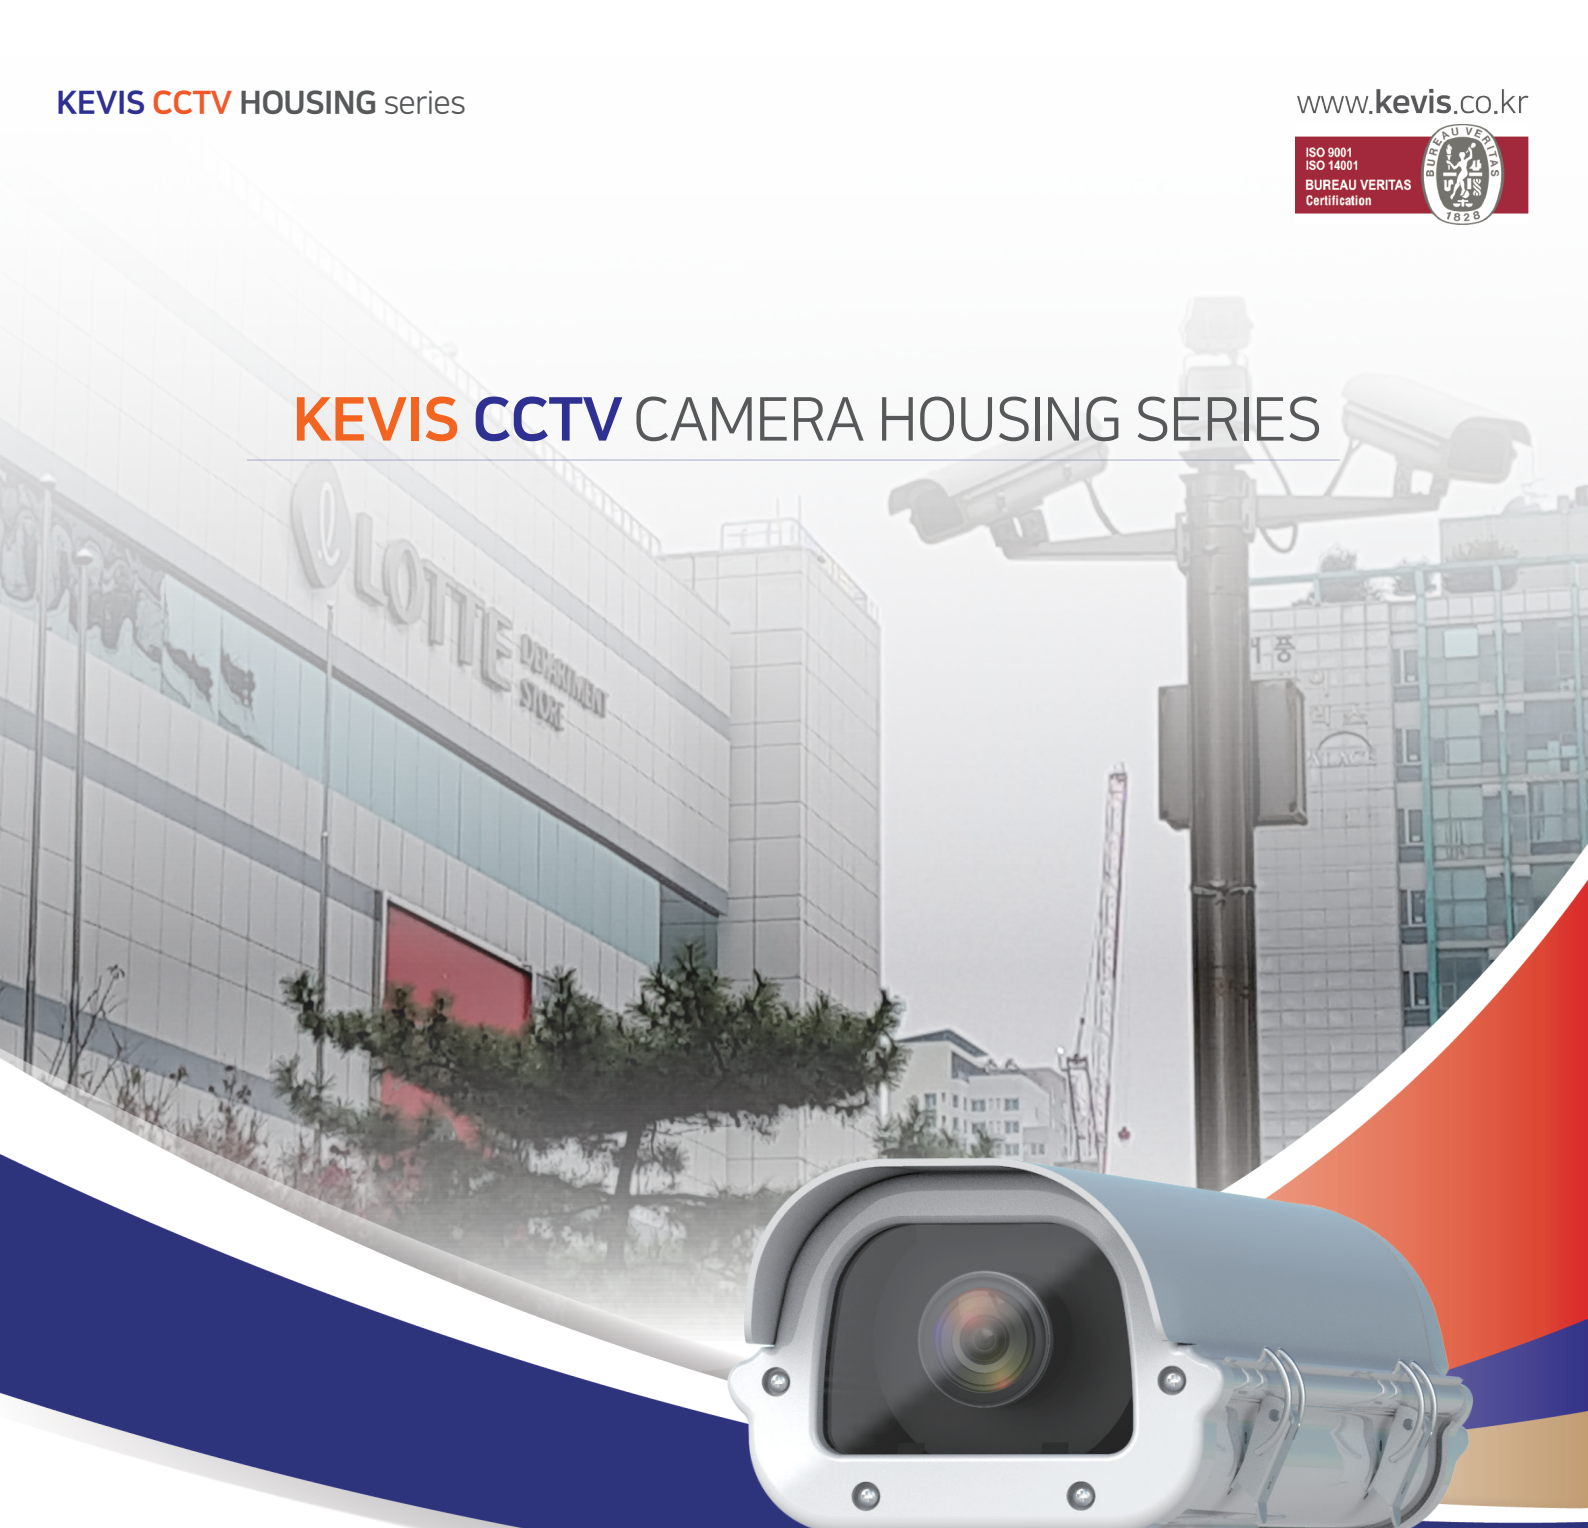

FH-5140 HB

Kevis IN/Outdoor Aluminum Housing

- Aluminium indoor/ outdoor housing
- Day&Night (IR LED option)
- Smart heater/fan (optional)
- Full waterproof (IP 55) outdoor housing
- Option : Sun shield (S), Heater (H), Blower (B)

OPTION : KBR-060CC BRACKET

FH-5140HB

IN / Outdoor Aluminum Housing

Housing Series



Specifications

Usage & Open Type	IN / Outdoor & Side Hinge Type
Options	Heater (H), Blower (B) IR LED Lamp(IR)
Body & Color	Aluminum 6063 UV Protect Powder Coating & Cool Gray 1C
Power	Heater & Blower : 24V / 110V / 230V
Temperature of use	FH-5140 : -15°C~+50°C FH-5140HB : -40°C~+50°C (Heater, Blower)
Safety certification	CE
IP Level	IP 55
Dimension (Out side) mm	144(w) x 111(h) x 460(d)
Dimension (In side) mm	100(w) x 80(h) x 310(d)
Weight	1.5kg
Accessories	Spring Washa M6, Flat Washer M6, Screw 1/4"-20X3/8" 3ea

※ Design and Specification can be different between latest production, Please contact out sales for update.
· IP55 is applied when the product is correctly installed and assembled as a shipping condition.


Product Features

- Aluminium indoor/ outdoor housing
- Day&Night (IR LED option)
- Smart heater/fan (optional)
- waterproof (IP 55) outdoor housing
- Option : Sun shield (S), Heater (H), Blower (B)

Model option

- 1.FH-5140H (Heater)
- 3.FH-5140HB (Heater, Blower)

Product inside

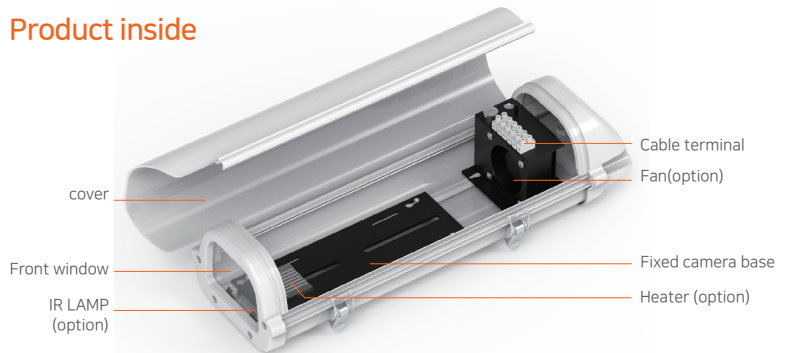


Dimensions

MODEL	Outside (mm)	Inside (mm)	Weight(kg)
FH-5140	144(w) x 100(h) x 437(d)	100(w) x 80(h) x 330(d)	1.5
FH-5140H	144(w) x 100(h) x 437(d)	100(w) x 80(h) x 330(d)	1.8
FH-5140HB	144(w) x 100(h) x 467(d)	100(w) x 80(h) x 360(d)	2

Exterior drawing


UNIT(mm)

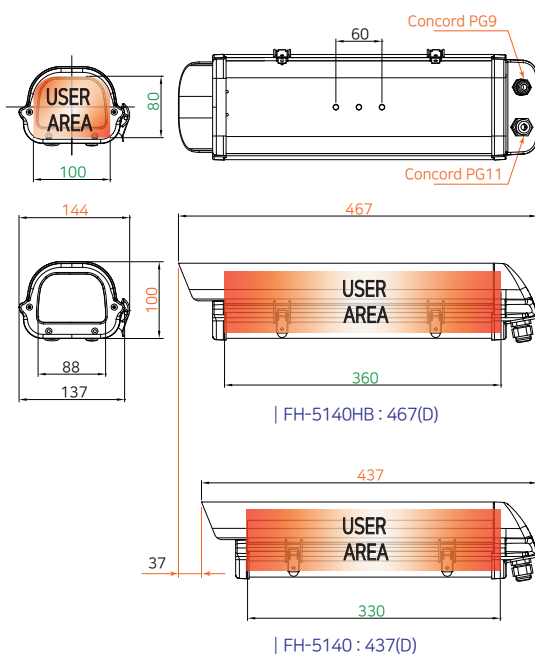


Accessories

UNIT(mm)

| KBR-060CC | Wall Mount

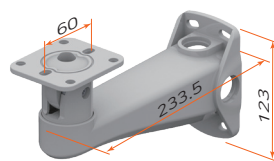

| KBR-1000 | Wall Mount

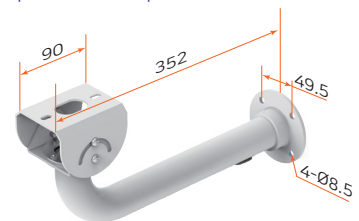

Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x145.5x75

※ PTB-100 Compatible

Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 2C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ KBR-2000 ~ KBR-5000 Compatible